

Eligible for  
Australian Federal  
& State Government  
incentives including  
STC's

# AQUA PLUS

## All in One

6 Year Warranty\*

works with  
**Smart Life**

Download on the  
**App Store**

GET IT ON  
**Google Play**



App. No NSW29118



IMK32348  
AS/NZS 2712



WaterMark

WM-032348  
AS 3498



Natural refrigerant - low global warming potential



Booster mode produces 75°C max hot water



Noise reduction design provides a super quiet at 43dB




Built-in 1.8kW electric heater gives high efficiency at any conditions



50mm foam insulation ensures stable operation down to -7°C



Patented SPD defrosting technology ensures that the heat pump water heater defrosts quickly at low temperatures

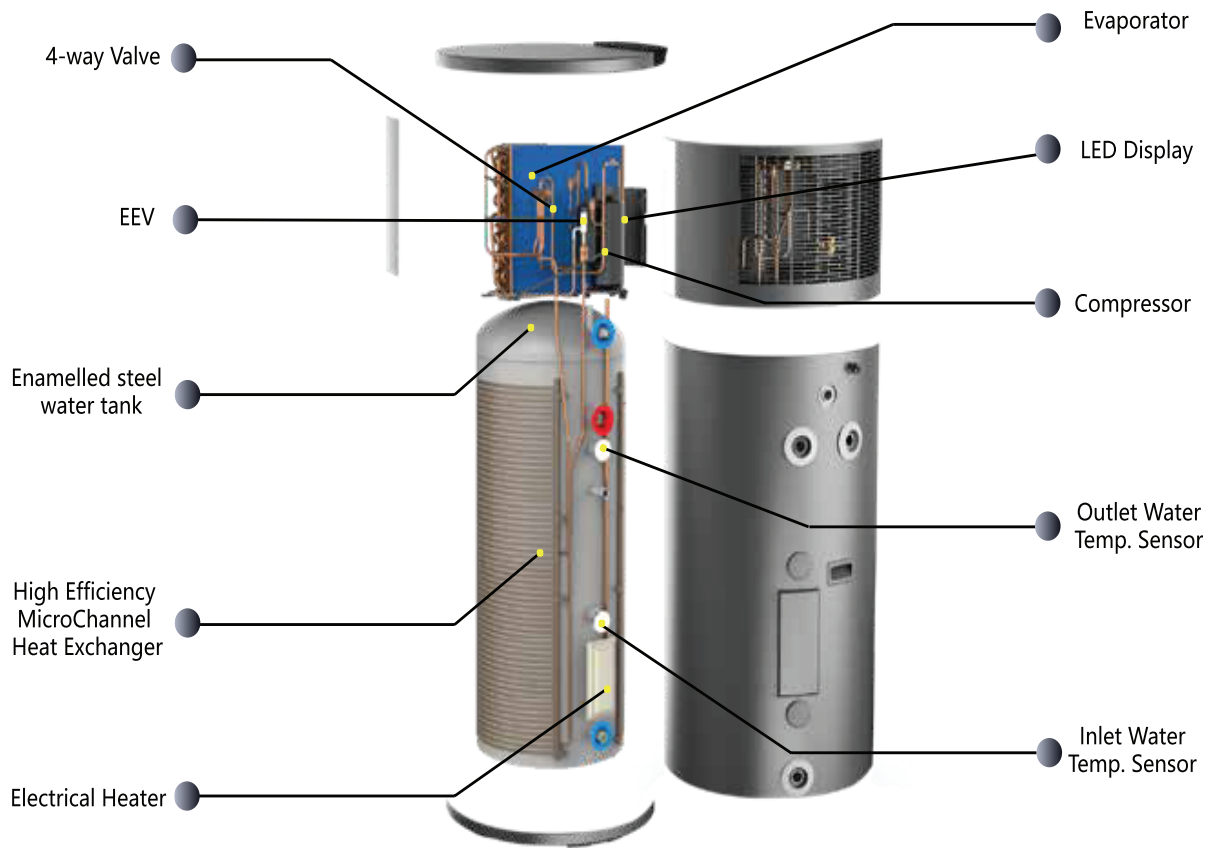

Model		APAIO200	APAIO270
Heating Capacity (kW)*		2.78	2.78
COP		4.15	4.15
How Water Production Rate (L/h)		60	60
Max input Power (W)		3000	3000
Max Input Current (A)		14	14
Power Supply		220-240v/50Hz	220-240v/50Hz
Heat Pump	Rate Power (W)	1200	1200
	Rated Current (A)	5.3	5.3
Electric Heater	Rate Power (W)	1800	1800
	Rated Current (A)	7.5	7.5
Refrigerant		R290	R290
Compressor		GMCC	GMCC
Net Dimension (mm)		626 x 1565	626 x 1880
Package (mm)		700 x 700 x 1667 (including pallet)	700 x 700 x 1982 (including pallet)
Net Weight (kg)		104	118
Gross Weight (kg)		115	130
Noise (dB)		43	43
Water Tank Volume (L)		200	270
Working Temperature Range (°C)		-7~43	-7~43

\*Heating capacity at Air temp. 20°C / 15°C, Water Temperature from 15°C to 55°C